



Joey Assembly Instructions



Joey Companion Caddy

Congratulations on the purchase of your new Joey Companion Caddy. Every effort has been taken to ensure your complete satisfaction with this custom designed product. For your convenience the Joey Companion Caddy is supplied in one ready to assemble pack.

Helpful Assembly Hints

Read the instructions carefully before starting. Check to see that all the parts are included. Work in a spacious area preferably on a carpet or soft surface. You will need a phillips head and flat head screw driver for the assembly. A cordless drill is preferable. Ensure the phillips head screwdriver fits neatly and fully engages the screw head. Failure to do this may result in screw damage. Make sure you tighten all the screws securely and tap dowels all the way in.

Warranty Information

G-day mate! We warranty our product for 1 year from date of shipment for manufacturer's defects or shipping damage within the first 15 days. The warranty does not cover damage caused by abuse, mis-use, alteration, accident, or neglect of the product. The warranty does not cover damage caused by moving the cabinet fully loaded. Under the terms of this warranty the repair and replacement of any parts shall be at the discretion of the company or their designated representative.

Replacement Part Shipping Policy

To help protect our valuable resources, we ship all replacement parts out at the same time. This procedure lessens the use of packaging materials and fossil fuels used in transportation keeping our world for all kangaroos and the people like you a cleaner place. Please help us in this endeavor by reviewing all parts in all boxes for damage before calling or e-mailing us to report damage. We adhere to our environmental philosophy by only shipping replacement parts out 1 time for free. Future parts requests will be billed at the customer's expense.

Caddy Care

Your Joey Companion Caddy normally requires a minimum amount of maintenance, however the following points are worth noting:

CLEANING - To remove marks and enhance the surface, wipe over with a general purpose cleaner.

CAUTION - Do not use ammonia based cleaning agents. Do not use harsh chemicals or abrasive cleaners. The surface can be wiped with a damp cloth but should be dried quickly.

















If you have missing or damaged parts please call Kangaroo Kabinets at 1-800-533-7347




or email us at: cs@kangarookabinets.com

Also visit our website: www.kangarookabinets.com

Kangaroo Kabinets is a product
of Arrow Sewing Cabinets


Joey Assembly Instructions

COMPONENTS	DESCRIPTION	QTY
	Cam Bolt 24mm	8
	Cam 15 x 12mm	8
	Dowel 8 x 30mm	18
A 	(A) Screw 3.4 x 15mm	2
E 	(E) Screw 3 x 25mm	3
F 	(F) Screw 4 x 16mm	12
	Caster Washer	4
	Extension Caster	4
	Caster Wrench	1
	Cam Bolt	6
	Cam 15 x 10mm	6
	Screw 4 x 32mm	12
	Drawer Runners*	3 sets
	Button Handle + Screw	6
	Glue Bottle	2
	Stabilizer Wedge	6

COMPONENTS	DESCRIPTION	QTY
	Key Hole	1
	Lock & Key	1
	Lock Striker	1

*Excludes pre-attached Drawer Runners on Drawer Sides

Joey Storage Cabinet panels and their descriptions

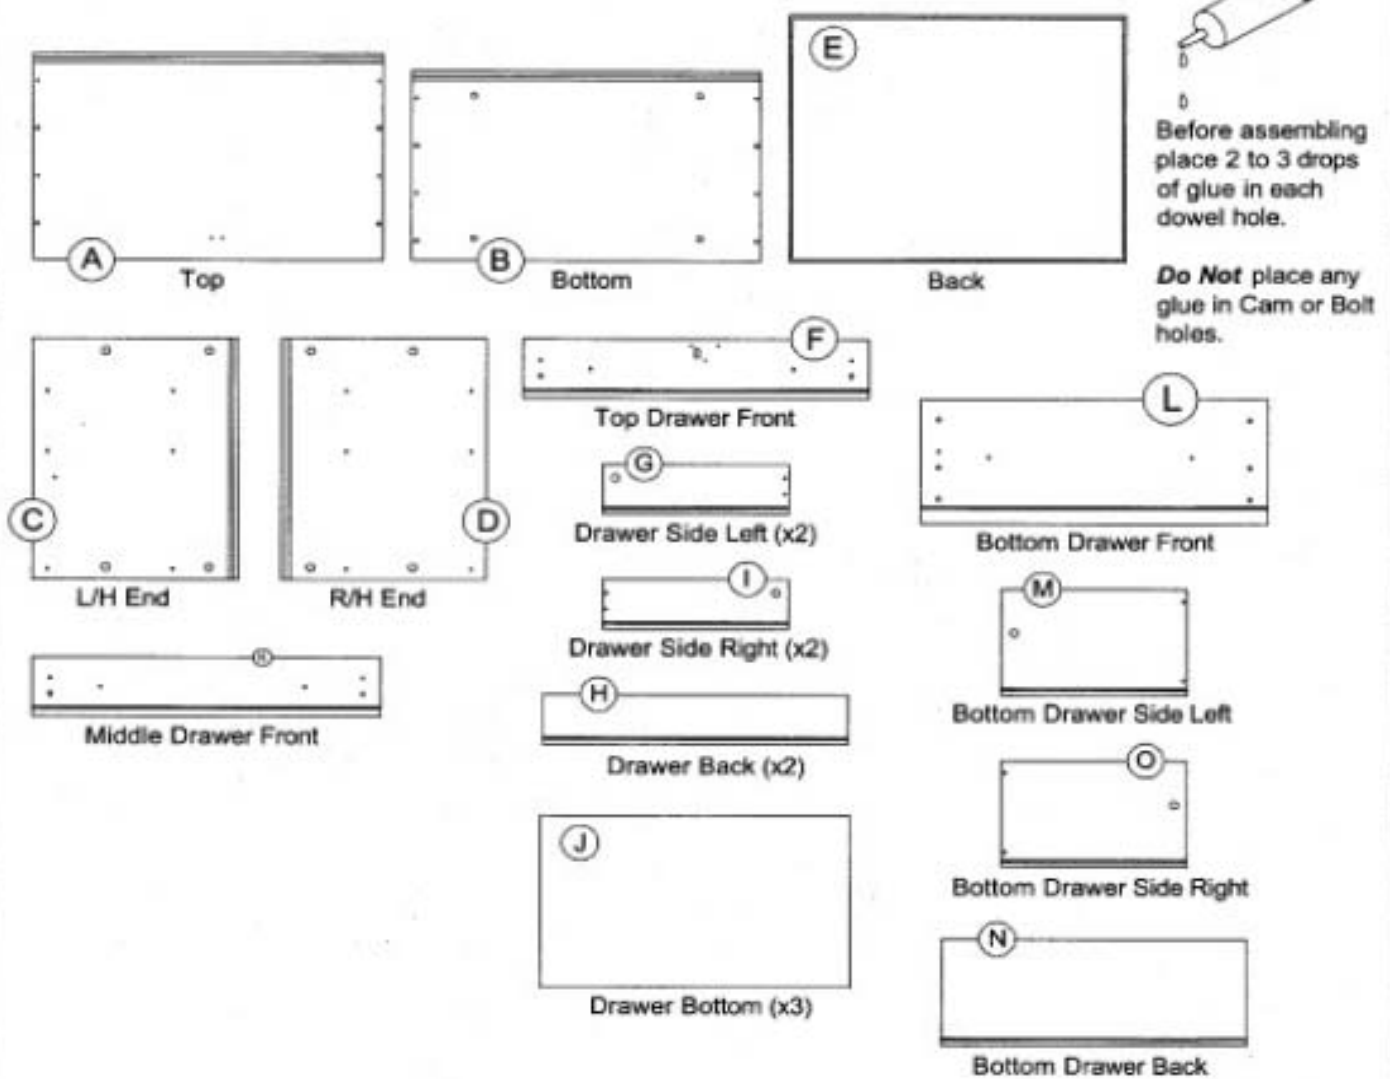

Lock Striker




(A) Screw x 2



Cam Bolt 24mm x 4


Step 1: Gather Top Panel (A). Screw Cam Bolts into Panel (A) as shown. Attach the Lock Striker using 2 (A) Screws.

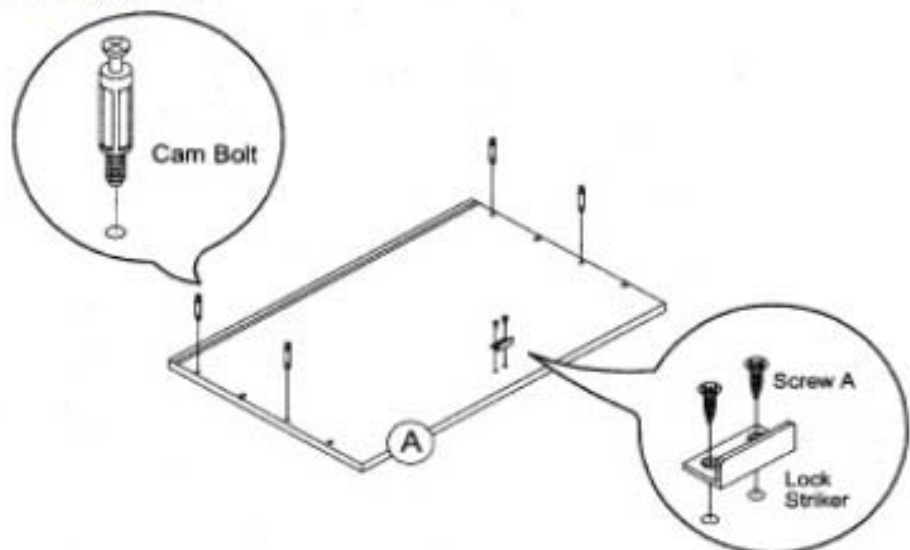



Cam Bolt 24mm x 4

Step 2: Gather Bottom Panel (B). Screw Cam Bolts into Panel (B) as shown.

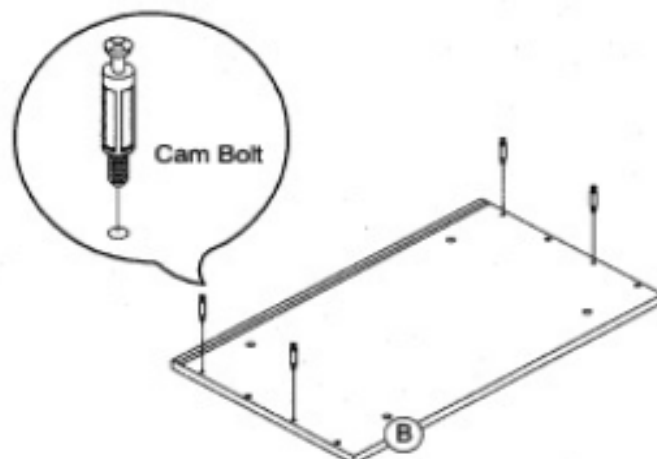

Dowel x 4



Cam 15 x 12mm x 4




Right Drawer Runners x 2



(F) Screw x 4

Step 3: Gather R/H End Panel (D). Place 2 to 3 drops of glue into each dowel hole on the edge of Panel (D) and insert 4 Dowels. Insert Cams ensuring the arrow points toward the closest edge. Attach Right Drawer Runners to Panel (D) using 4 (F) Screws.

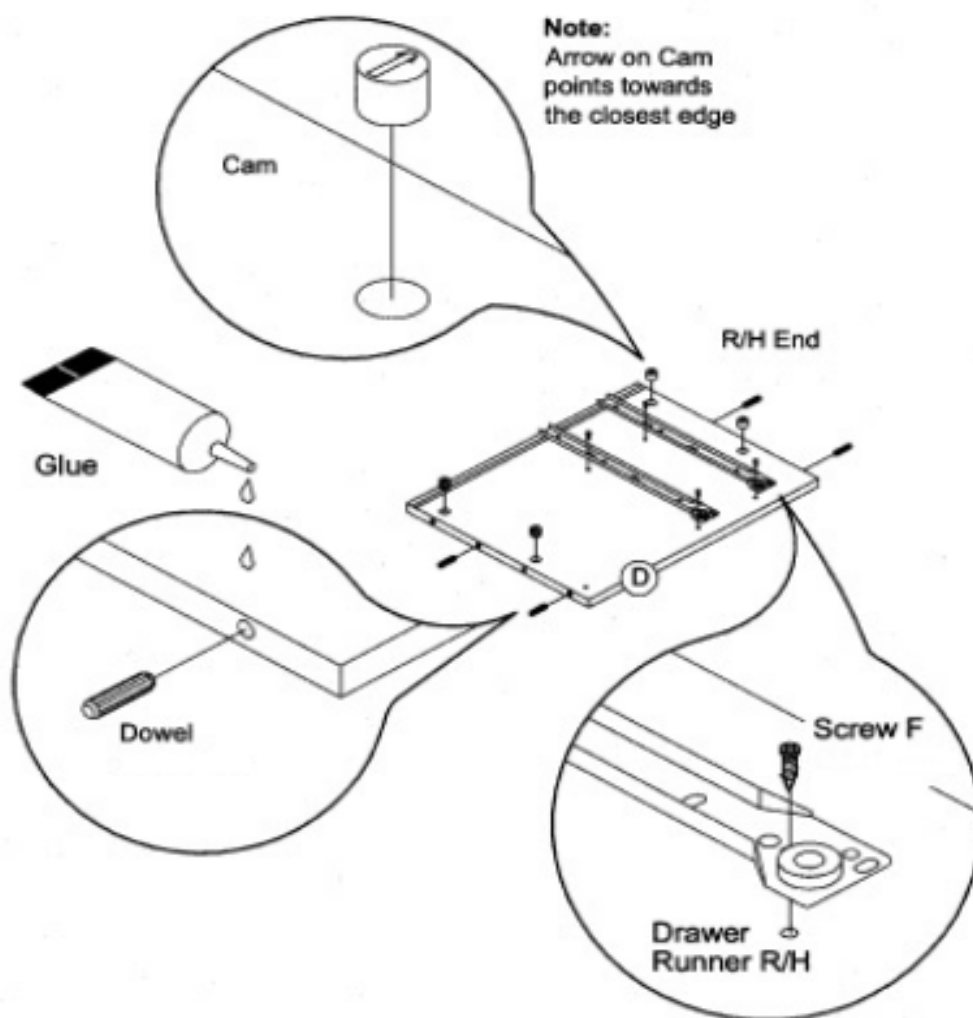

Step 4: Gather L/H End Panel (C). Place 2 to 3 drops of glue into each dowel hole on the edge of Panel (C) and insert 4 Dowels. Insert Cams as shown. Attach Left Drawer Runners using 4 (F) Screws



Dowel x 4




Cam 15 x 12mm x 4




Left Drawer Runner x 2




(F) Screw x 4

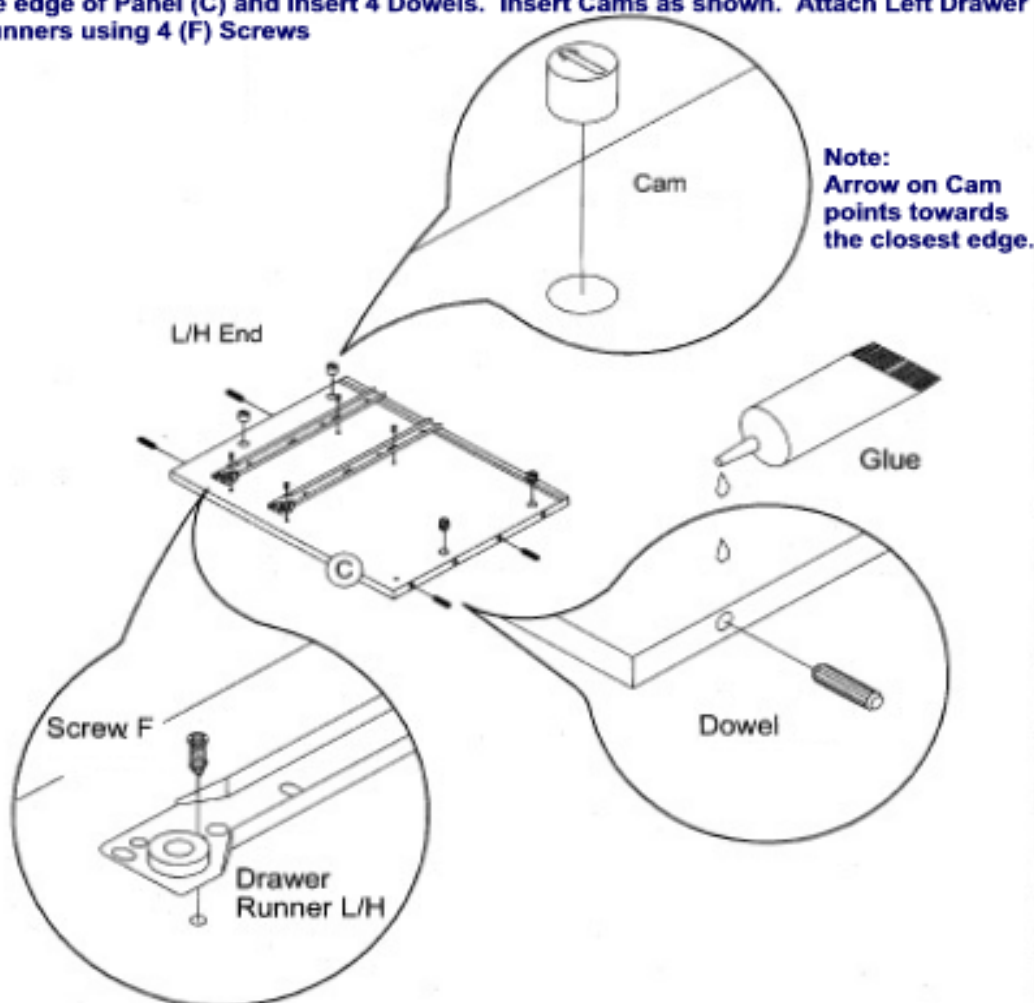


Step 5: Place Glue in Dowel holes on Panel (B). Attach Panel (C) and (D) to Panel (B) as shown, securing by tightening the Cam Bolts one half turn clockwise.

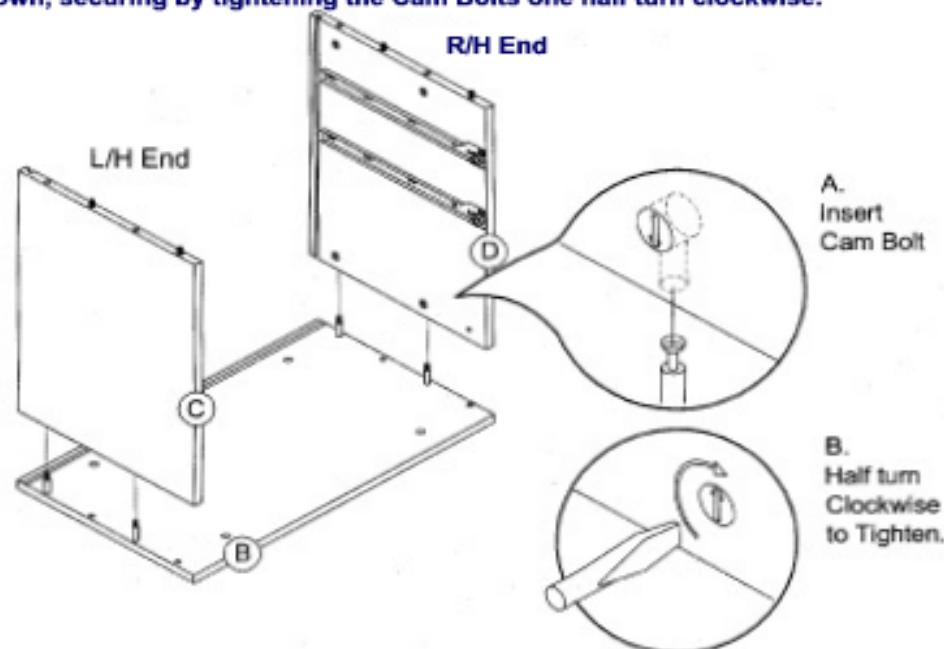

Step 6: Gather Back Panel (E). Apply a small bead of Glue to the grooves on Panels (C) and (D). Slide the Back Panel (E) into the grooves of Panels (C) and (D) as shown, with the beige face towards the inside of the Cabinet Assembly.

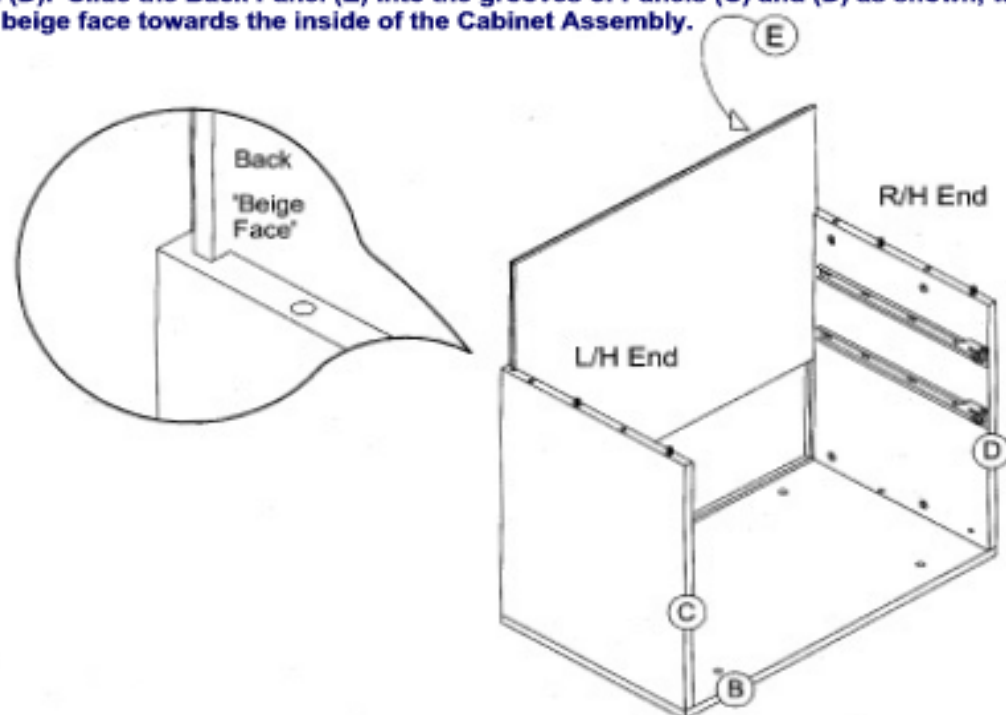


Step 7: Gather Top Panel (A). Place 2 to 3 drops of Glue in the Dowel holes in Panel (A) and attach Panel (A) to Cabinet Assembly as shown. Secure the Top by turning Cams clockwise one half turn. With the help of two people rotate the Cabinet over onto its top.

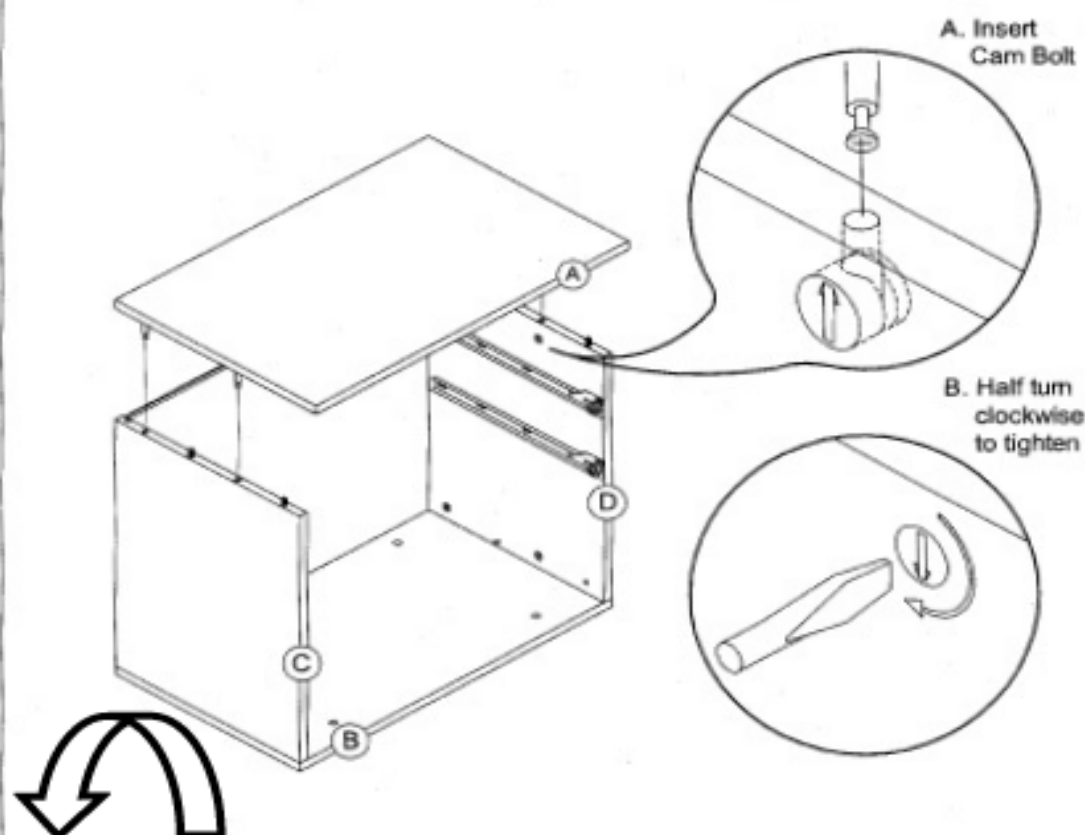





Step 8: Guide the Extension Casters through the Caster Washers and screw into holes provided as shown, use the Caster Wrench to tighten. Rotate Chest back upright using 2 people.

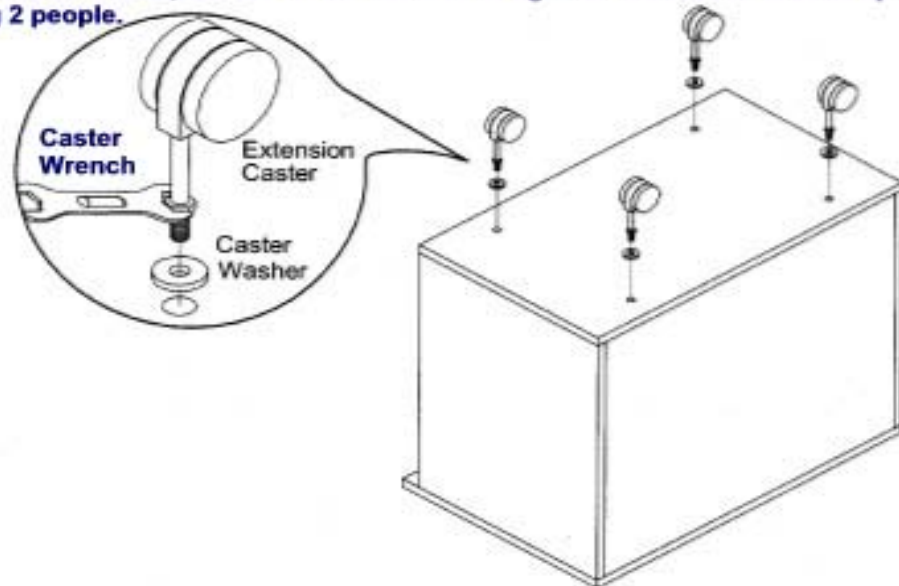

Step 9: Attach Drawer Runners to inside and bottom of the Cabinet sides using 4 (F) Screws as shown.

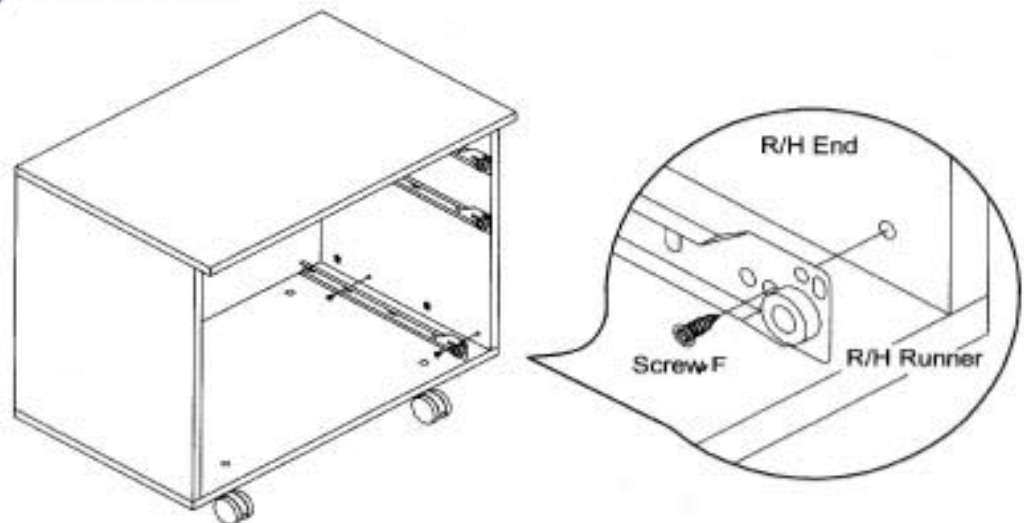


Step 10: Gather Top Drawer Front (F). Screw Cam Bolts into the Drawer Front as shown. Attach the Lock using 3 (E) Screws. Add Glue to edge of Key Hole and press fit into hole as shown.

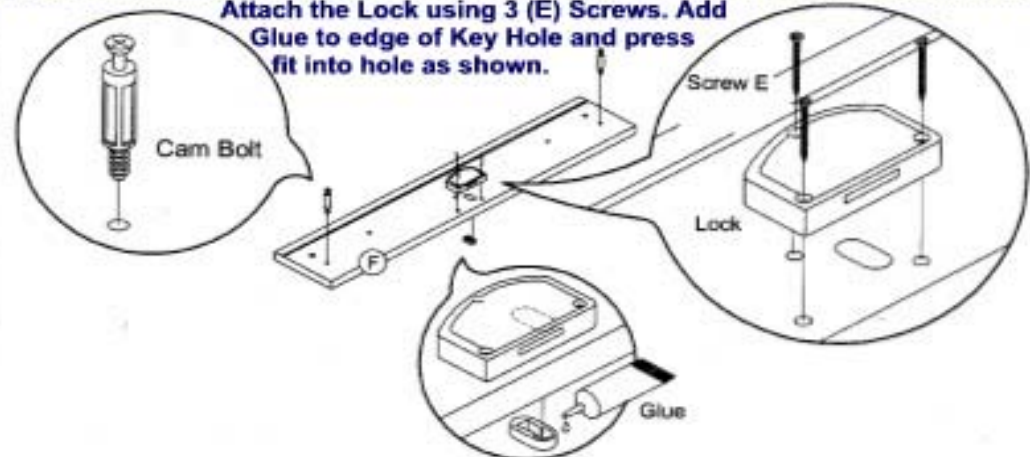

Cam 15 x 10mm x 4
Dowel x 4
Cam Bolt x 2

Step 11: Gather Parts (G), (I) and (K). Place Glue in each Dowel hole in the Drawer Sides and insert 4 Dowels. Insert Cams into the Drawer Sides as shown. Screw in Cam Bolts into the Middle Drawer Front (K).

Note:
Arrow on Cam
points towards
the closest edge

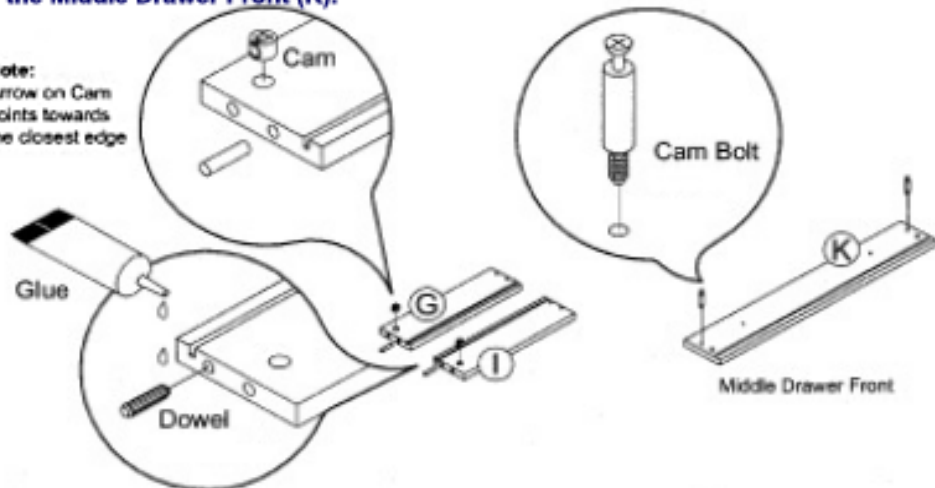


Screw 4 x 32mm x 4

Stabilizer Wedge x 2


Button Handle x 2

Handle Screw x 2

Step 12: Gather parts (J) and (F). Attach Drawer side (G) and (I) to Drawer Back (H) using (4) 4 x 32mm Screws as shown. Slide the Drawer Bottom (J) into Drawer Side grooves as shown. Place glue into Dowel Holes in Drawer Front (F), then attach Front (F) to Drawer Sides (G) and (I), secure Cams. Attach the Drawer Handles as shown.

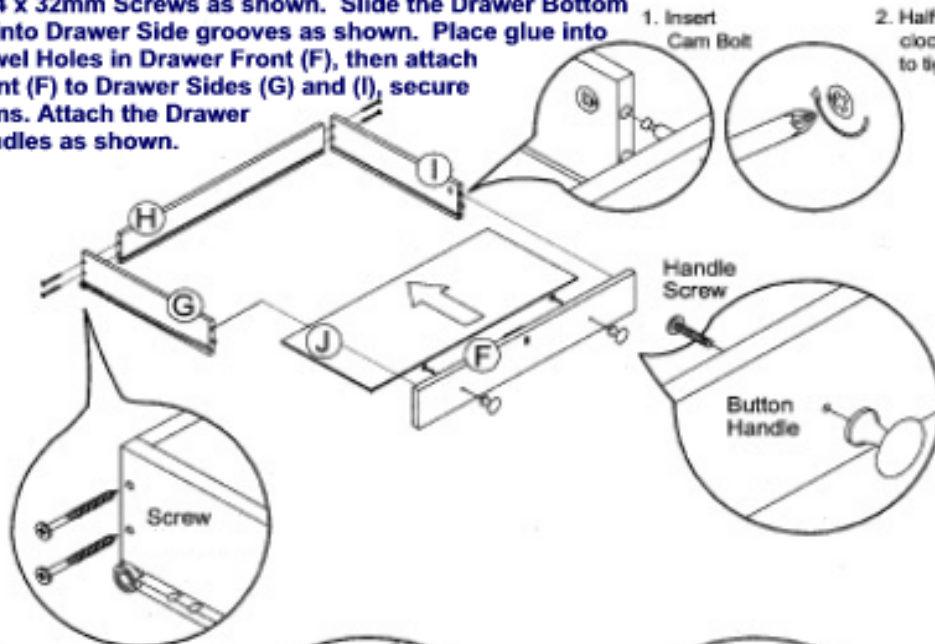

Turn Drawer over, attach Drawer Stabilizers in the middle of the Drawer Back and press firmly into the groove. Then screw into place. Repeat into the Drawer Front as shown.

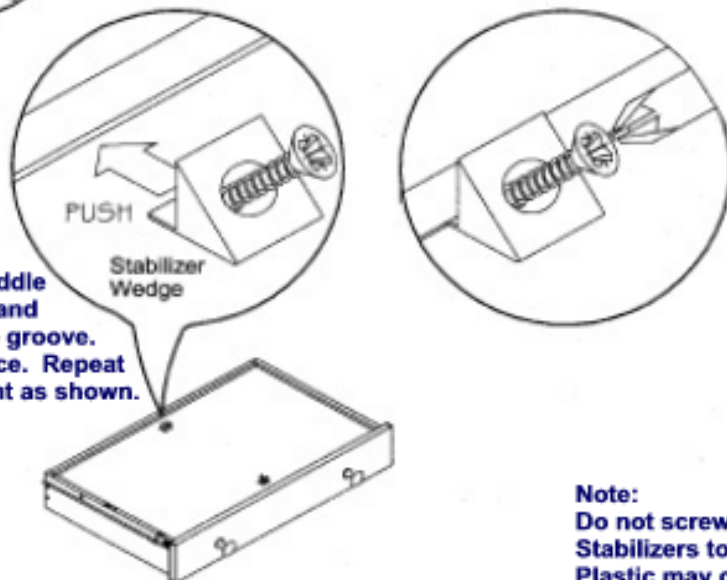

Note:
Do not screw in the
Stabilizers too tight.
Plastic may crack
if over tightened.

Step 13: Gather parts (J) and (K). Attach Drawer side (G) and (I) to Drawer Back (H) using (4) 4 x 32mm Screws as shown. Slide the Drawer Bottom (J) into Drawer Side grooves as shown. Place glue into Dowel Holes in Drawer Front (F), then attach Front (K) to Drawer Sides (G) and (I), secure Cams. Attach the Drawer Handles as shown.

Screw 4 x 32mm x 4

Stabilizer Wedge x 2

Button Handle x 2

Handle Screw x 2

Turn Drawer over, attach Drawer Stabilizers in the middle of the Drawer Back and press firmly into the groove. Then screw into place. Repeat into the Drawer Front as shown.

Note:
Do not screw in the Stabilizers too tight. Plastic may crack if over tightened.


Step 14: Gather parts (M), (O) and (L). Place glue in each Dowel hole in the Drawer Sides and insert 6 Dowels. Insert 2 Cams into Drawer Sides as shown. Screw 2 Cam Bolts into the Drawer Front (L).

Cam 15 x 10mm x 2

Dowel x 6

Cam Bolt x 2

Note:
Arrow on Cam points towards the closest edge

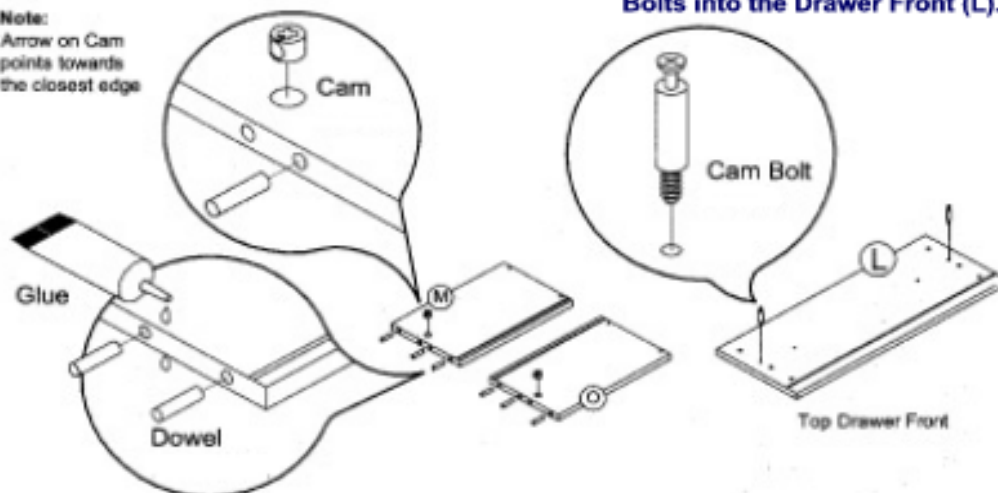


 Screw 4 x 32mm x 4

 Stabilizer Wedge x 2


 Button Handle x 2

 Handle Screw x 2

Step 15: Gather Parts (M), (N), (O) and (L). Attach Drawer Side (M) and (O) to Back (N) using (4) 4 x 32mm Screws as shown. Slide Drawer Bottom into the grooves on the Drawer Sides. Place Glue into the Dowel holes in the Drawer Front. Attach Drawer Front to Drawer Sides as shown. Secure Cams.

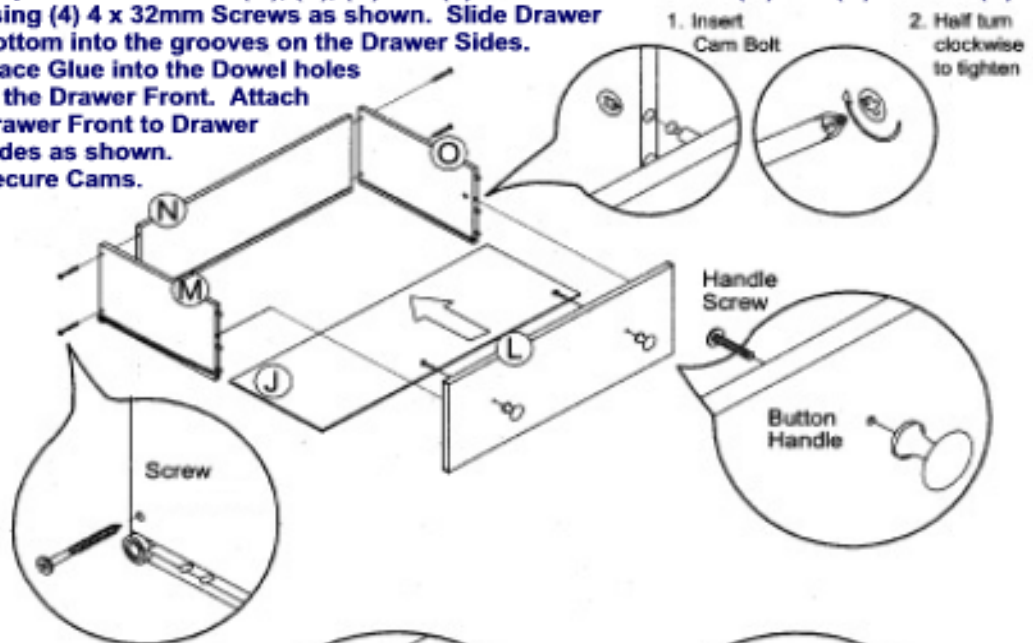

Attach Button Handles as shown. Turn Drawer over, attach Drawer Stabilizers in the middle of the Drawer Back and press firmly into the groove. Then screw into place. Repeat into the Drawer Front as shown.

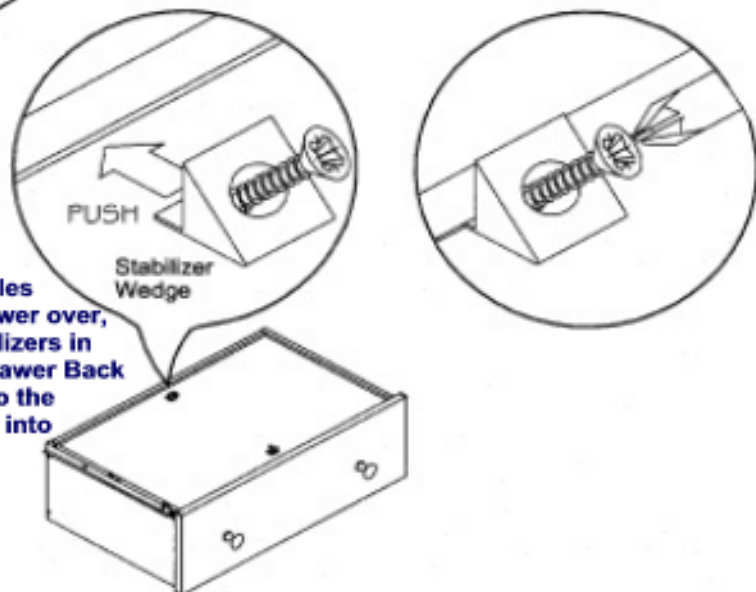

Step 16: Insert Drawers onto the runners in the Cabinet. Ensure the Locking Drawer is positioned to the top and the large Drawer is on the Bottom Runners. Lock the Top Drawer to make moving easier.

